

**NEW**

## Refrigerators and Freezers



**HOSHIZAKI**

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)



# HOSHIZAKI

## C o n t e n t s



### New Refrigerators and Freezers

Introduction	ii - iv
<b>COMPACT</b>	a1.01
Product Highlights & Definitions	a1.02 - 1.03
COMPACT Range	a1.04 - 1.12
<b>EURO</b>	b1.01
Product Highlights & Definitions	b1.02 - 1.03
EURO Range	b1.04 - 1.06
<b>GASTRO o7</b>	c1.01
Product Highlights & Definitions	c1.02 - 1.06
GASTRO o7 Range	c1.07 - 1.12
<b>GASTRO o8</b>	d1.01
Product Highlights & Definitions	d1.02 - 1.05
GASTRO o8 Range	d1.06 - 1.12
<b>MIDI</b>	e1.01
Product Highlights & Definitions	e1.02 - 1.03
MIDI Range	e1.04 - 1.11
<b>PLUS</b>	f1.01
Product Highlights & Definitions	f1.02 - 1.03
PLUS Range	f1.04 - 1.13
<b>PROCESS</b>	g1.01
Product Highlights & Definitions	g1.02 - 1.03
PROCESS Range	g1.04 - 1.09
<b>TWIN</b>	h1.01
Product Highlights & Definitions	h1.02 - 1.03
TWIN Range	h1.04 - 1.12



# Hoshizaki Launches its Hydrocarbon Refrigeration Range

Hoshizaki extends its current range with Eco Friendly Refrigerators and Freezers, supporting our vision for a Cool and Clean World.

A refrigerator or freezer in a commercial kitchen is exposed to intensive daily use.

Hoshizaki's new energy-efficient refrigerators and freezers are built to cope with such demands for many years. By utilising efficient, energy-optimised refrigeration technology, this new lineup also achieves the lowest energy consumption on the market.

Low Energy Consumption - low cost of ownership

**5-year extended warranty on energy-efficient products**

\*Hoshizaki offers Free 5 years parts and labour warranty to ensure peace of mind. We also offer a 10 year guarantee on spare parts even for a model that has been discontinued.

Service manuals and operating instructions are available on our user-friendly website [www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)



Eco friendly, energy efficient refrigerators and freezers use as standard only Hydrocarbon 'Green' refrigerants and foam propellants.



Parts & Labour



\*Hoshizaki PLUS, TWIN, EURO, MIDI, GASTRO 7, GASTRO 8, COMPACT ranges are covered by 5 years extended warranty. Hoshizaki PROCESS range is covered by 3 years extended warranty for all products with built in compressors. All remote compressor versions are covered by 1 year parts only warranty. See our Terms and Conditions (included in Price List) for more information on our basic warranty.



## Cut Your Electricity Bill!



Tests show that in a professional kitchen, refrigerator doors are typically opened and closed more than 100 times in a working day\*. Hoshizaki energy-efficient refrigerators and freezers are built to cope with this severe workload for many years.

What effect will this actually have on your electricity bill?

Replacing, for example, a 660 litre refrigerator using traditional HFC refrigeration technology with a Hoshizaki energy-efficient refrigerator of the same size will provide a saving of no less than £ 800. And this is just the saving during the first five years, when the refrigerator is covered by our extended product warranty.




### Comparative Example:

	<b>Hoshizaki Plus M 660 CXG</b>	<b>K 660 OPCH Trad. HFC Technology</b>
Volume, gross (litre)	660	660
Energy consumption (kWh/year)	683	2285
Yearly energy expense at 10 pence/kWh	68.3	228.5
		

Tests\* undertaken in hard working environments in professional kitchens show that the potential electricity saving of Hoshizaki energy-optimised refrigerators and freezers is 74 and 47%, respectively.

\* Source: Final report from the Danish Technological Institute



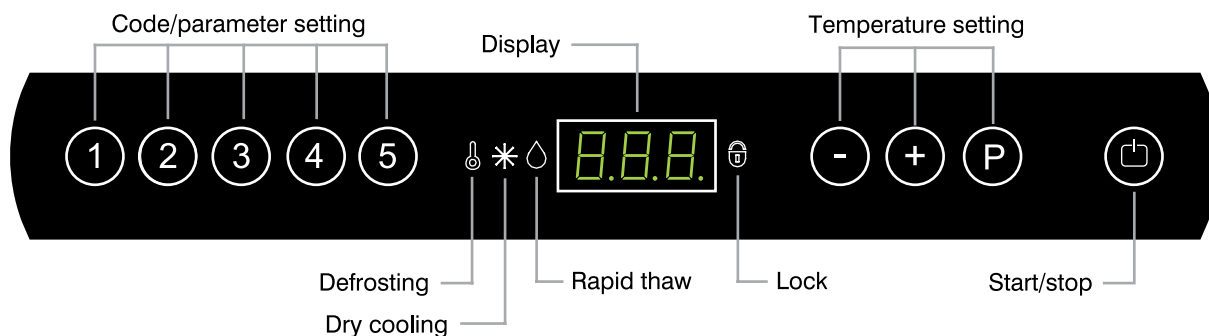

## The Controller\* - Gives You Full Control

### Optical alarm:

The display will indicate when a temperature limit is exceeded.

### Controller panel lock:

The controller can be locked to stop unauthorised tampering.

### Open door alarm:

An acoustic door alarm will sound if the door is left open.

### Volt-free contact:

This enables connection of the cabinet to a remote alarm system.

### Defrost function:

Automatic defrost cycle. The panel indicates when the cabinet is on defrost. This cycle can be changed according to the conditions in your kitchen.

### Error codes in the display:

The display can indicate fault codes ensuring speedy resolution of any issue.

### Power failure:

If a power failure occurs the control will remember the set previous temperature and restart when the power returns.

### Dry cooling:

The moisture level in the cabinet can be controlled by activating or de-activating the dry cooling function (M-versions of CX upright cabinets only).

### Rapid thaw function:

This advanced function is used for the safe and controlled thawing of frozen products to HACCP standards (M-versions of CX upright cabinets only).

### Factory setting:

This enables a return to factory settings using the control panel.


## Our Catalogue and Pricing

### Structure and content

Our Refrigeration section is subdivided into sub categories relating to a specific line of products. Information on prices and optional extras can be found in our **Price List 2013-Refrigeration. Please contact your local sales branch.**

Each product variant has a model designation which relates to an exact specification.

The example below shows how the designation is to be read:

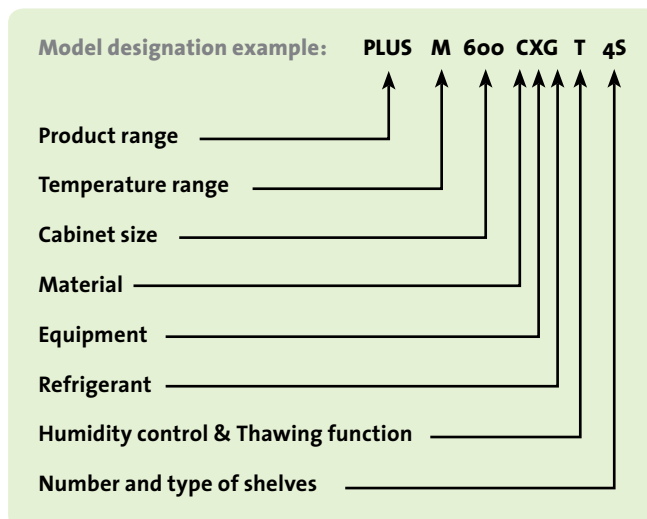

\* Applies to all refrigerator and freezer cabinets and counters except for the COMPACT and STANDARD cabinets and counters.



**NEW**

# Hoshizaki COMPACT

Refrigerator & Freezer Range



**ECOFRIENDLY  
HFCFREE**



Parts & Labour



## COMPACT Product Highlights

The New COMPACT 210, 410 and 610 range sets new standards for compact fridges and freezers across Europe.


Lower your cost of ownership and help reduce your carbon footprint. This 'Green' HC range of cabinets and counters offer ultra-low energy consumption combined with excellent warranty terms.

### Ideal for kitchens with limited space

COMPACT cabinets take up little floor space with an outside width of only 60cm and depth of 64cm. You can build them under counter, stack them on top of each other or wall-mount.

### Functional Design

- Full-height integrated door handle.
- Sturdy wire shelves with tilt prevention.
- The wire shelves are mounted in U-shaped rails moulded into the ABS inner lining. This prevents the shelves from tilting when pulled out.
- The COMPACT 610 is equipped with stainless wall rails and shelf supports.

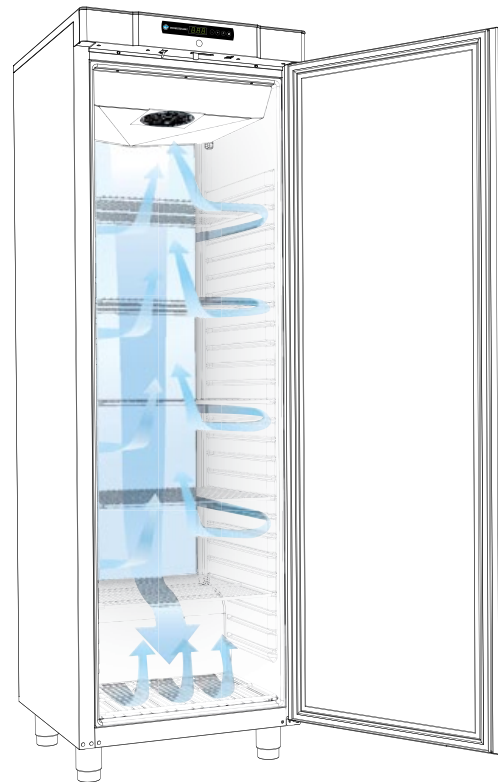


### Unique Air Distribution System

The COMPACT cabinets maintain a correct and uniform temperature throughout. The cold air is directed down behind the air distribution plate positioned at the back of the cabinet. From there, it circulates around the cabinet and back to the evaporator fan in the top of the cabinet.

### Easy Cleaning

The range has a durable one piece moulded ABS inner lining with rounded corners.



The door gasket can be easily removed for cleaning.

### Improved Reliability

The easy to use control system has built-in alarms and emergency programs that help to maintain temperature until a fault is rectified.



### Integrated LED Lighting

LED lighting is built into the glass door.



## COMPACT Definitions

### COMPACT Basic Codes:

<b>K</b>	<b>210</b>	<b>LG</b>	
			→ <b>G</b> HC gas compressor (R290)
			→ <b>H</b> HFC compressor (chilling R134a, freezing R404A)
			→ <b>R</b> Stainless exterior sides (Aisi 430)
			→ <b>L</b> White exterior sides
			→ <b>210</b> 125 litre gross volume (H=830 mm)
			→ <b>310</b> 218 litre gross volume (H=1300 mm)
			→ <b>410</b> 346 litre gross volume (H=1875 mm)
			→ <b>K</b> Refrigerator with solid door
			→ <b>KG</b> Refrigerator with glass door
			→ <b>F</b> Freezer with solid door

### Equipment Codes

<b>60Hz</b>	230V, 60 Hz compressor
<b>DL</b>	Left hand hung door
<b>C</b>	Castors H= 125 mm
<b>L1</b>	Legs H=100/135 mm
<b>L2</b>	Legs H=135/200 mm
<b>LM</b>	Legs for maritime cabinet
<b>P</b>	Prepared for plinth mounting
<b>W</b>	Wall mounting
<b>xN</b>	Number of grey shelves in plastified
<b>xW</b>	Number of white shelves in plastified
<b>xS</b>	Number of shelves in stainless



## COMPACT K 210 RG 3N - Refrigerator

Item Number	862100441 (A)
Equipped With	Right hand hinged reversible door with lock, 3 grey shelves
Temperature (°C)	+2 to +12
Volume / Gross	125 ltr./4.4 cu.ft.
Volume / Net	104 ltr./3.7 cu.ft.
Exterior / Interior	Stainless/ABS lining in grey
Dimensions W x D x H (mm)	595 x 640 x 830
Weight, Packed (kg)	46
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	154 Watt
Connection	230V/50Hz
Connection Load	99 Watt
Power Consumption	0.5 kWh/24h



## COMPACT F 210 RG 3N - Freezer

Item Number	862120441 (A)
Equipped With	Right hand hinged reversible door with lock, 3 grey shelves
Temperature (°C)	-22 to -5
Volume / Gross	125 ltr./4.4 cu.ft.
Volume / Net	104 ltr./3.7 cu.ft.
Exterior / Interior	Stainless/ABS lining in grey
Dimensions W x D x H (mm)	595 x 640 x 830
Weight, Packed (kg)	46
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -25°C	156 Watt
Connection	230V/50Hz
Connection Load	120 Watt
System	No Frost with automatic reevaporation
Power Consumption	1.1 kWh/24h



## COMPACT K 210 LG 3W - Refrigerator

Item Number	862100461 (A)
Equipped With	Right hand hinged reversible door with lock, 3 white shelves
Temperature (°C)	+2 to +12
Volume / Gross	125 ltr./4.4 cu.ft.
Volume / Net	104 ltr./3.7 cu.ft.
Exterior / Interior	White/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 830
Weight, Packed (kg)	46
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	154 Watt
Connection	230V/50Hz
Connection Load	99 Watt
Power Consumption	0.5 kWh/24h



## COMPACT F 210 LG 3W - Freezer

Item Number	862120461 (A)
Equipped With	Right hand hinged reversible door with lock, 3 white shelves
Temperature (°C)	-22 to -5
Volume / Gross	125 ltr./4.4 cu.ft.
Volume / Net	104 ltr./3.7 cu.ft.
Exterior / Interior	White/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 830
Weight, Packed (kg)	46
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -25°C	156 Watt
Connection	230V/50Hz
Connection Load	120 Watt
System	No Frost with automatic reevaporation
Power Consumption	1.1 kWh/24h





## COMPACT K 410 RG C 6N - Refrigerator

Item Number	864100442 (A)
Equipped With	Right hand hinged reversible door with lock, 6 grey shelves
Temperature (°C)	+2 to +12
Volume / Gross	346 ltr./12.3 cu.ft.
Volume / Net	312 ltr./11.1 cu.ft.
Exterior / Interior	Stainless/ABS lining in grey
Dimensions W x D x H (mm)	595 x 640 x 1900
Weight, Packed (kg)	75
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	207 Watt
Connection	230V/50Hz
Connection Load	103 Watt
Power Consumption	0.6 kWh/24h



## COMPACT F 410 RG C 6N - Freezer

Item Number	864120442 (A)
Equipped With	Right hand hinged reversible door with lock, 6 grey shelves
Temperature (°C)	-22 to -5
Volume / Gross	346 ltr./12.3 cu.ft.
Volume / Net	312 ltr./11.1 cu.ft.
Exterior / Interior	Stainless/ABS lining in grey
Dimensions W x D x H (mm)	595 x 640 x 1900
Weight, Packed (kg)	78
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -25°C	212 Watt
Connection	230V/50Hz
Connection Load	142 Watt
System	No Frost with automatic reevaporation
Power Consumption	1.6 kWh/24h



## COMPACT K 410 LG C 6W - Refrigerator

Item Number	864100462 (A)
Equipped With	Right hand hinged reversible door with lock, 6 white shelves
Temperature (°C)	+2 to +12
Volume / Gross	346 ltr./12.3 cu.ft.
Volume / Net	312 ltr./11.1 cu.ft.
Exterior / Interior	White/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 1900
Weight, Packed (kg)	75
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	207 Watt
Connection	230V/50Hz
Connection Load	103 Watt
Power Consumption	0.6 kWh/24h



## COMPACT F 410 LG C 6W - Freezer

Item Number	864120462 (A)
Equipped With	Right hand hinged reversible door with lock, 6 white shelves
Temperature (°C)	-22 to -5
Volume / Gross	346 ltr./12.3 cu.ft.
Volume / Net	312 ltr./11.1 cu.ft.
Exterior / Interior	White/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 1900
Weight, Packed (kg)	78
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -25°C	212 Watt
Connection	230V/50Hz
Connection Load	142 Watt
System	No Frost with automatic reevaporation
Power Consumption	1.6 kWh/24h





## COMPACT K 610 RG C 4N - Refrigerator

Item Number	866100045 (A)
Equipped With	Right hand hinged reversible door with lock, 4 grey shelves
Temperature (°C)	+2 to +12
Volume / Gross	583 ltr./20.7 cu.ft.
Volume / Net	513 ltr./18.2 cu.ft.
Exterior / Interior	Stainless/ABS lining in grey
Dimensions W x D x H (mm)	695 x 868 x 2000
Weight, Packed (kg)	110
Insulation	60mm (cyclopentane)
Refrigerant	R600A
Ref. Capacity at -10°C	354 Watt
Connection	230V/50Hz
Connection Load	241 Watt
Power Consumption	0.9 kWh/24h

R134a refrigerant model also available. Item number: 866100045 (B).  
Please contact us for more details.



## COMPACT F 610 RG C 4N - Freezer

Item Number	866100245 (A)
Equipped With	Right hand hinged reversible door with lock, 4 grey shelves
Temperature (°C)	-25 to -5
Volume / Gross	583 ltr./20.7 cu.ft.
Volume / Net	513 ltr./18.2 cu.ft.
Exterior / Interior	Stainless/ABS lining in grey
Dimensions W x D x H (mm)	695 x 868 x 2000
Weight, Packed (kg)	113
Insulation	60mm (cyclopentane)
Refrigerant	R290 (propane)
Ref. Capacity at -25°C	512 Watt
Connection	230V/50Hz
Connection Load	435 Watt
System	No Frost with automatic reevaporation
Power Consumption	3.4 kWh/24h

R134a refrigerant model also available. Item number: 866100245 (B).  
Please contact us for more details



## COMPACT K 610 LG C 4N - Refrigerator

Item Number	866100062 (A)
Equipped With	Right hand hinged reversible door with lock, 4 grey shelves
Temperature (°C)	+2 to +12
Volume / Gross	583 ltr./20.7 cu.ft.
Volume / Net	513 ltr./18.2 cu.ft.
Exterior / Interior	White/ABS lining in grey
Dimensions W x D x H (mm)	695 x 868 x 2000
Weight, Packed (kg)	110
Insulation	60mm (cyclopentane)
Refrigerant	R600A (propane)
Ref. Capacity at -10°C	354 Watt
Connection	230V/50Hz
Connection Load	241 Watt
Power Consumption	0.9 kWh/24h
Options	Temperature range -5/+12°C



## COMPACT F 610 LG C 4N - Freezer

Item Number	866100262 (A)
Equipped With	Right hand hinged reversible door with lock, 4 grey shelves
Temperature (°C)	-25 to -5
Volume / Gross	583 ltr./20.7 cu.ft.
Volume / Net	513 ltr./18.2 cu.ft.
Exterior / Interior	White/ABS lining in grey
Dimensions W x D x H (mm)	695 x 868 x 2000 mm
Weight, Packed (kg)	113
Insulation	60mm (cyclopentane)
Refrigerant	R290 (propane)
Ref. Capacity at -25°C	512 Watt
Connection	230V/50Hz
Connection Load	435 Watt
System	No Frost with automatic reevaporation
Power Consumption	3.4 kWh/24h







## COMPACT KG 210 RG 3W - Refrigerator

Item Number	862110441 (A)
Equipped With	Right hand hinged glass door with lock, internal lighting, 3 white shelves
Temperature (°C)	+2 to +12
Volume / Gross	125 ltr./4.4 cu.ft.
Volume / Net	104 ltr./3.7 cu.ft.
Exterior / Interior	Stainless/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 830
Weight, Packed (kg)	52
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	154 Watt
Connection	230V/50Hz
Connection Load	103 Watt
Power Consumption	0.7 kWh/24h



## COMPACT KG 210 LG 3W - Refrigerator

Item Number	862110461 (A)
Equipped With	Right hand hinged glass door with lock, internal lighting, 3 white shelves
Temperature (°C)	+2 to +12
Volume / Gross	125 ltr./4.4 cu.ft.
Volume / Net	104 ltr./3.7 cu.ft.
Exterior / Interior	White/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 830
Weight, Packed (kg)	52
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	154 Watt
Connection	230V/50Hz
Connection Load	103 Watt
Power Consumption	0.7 kWh/24h



## COMPACT KG 410 RG C 6W - Refrigerator

Item Number	864110442 (A)
Equipped With	Right hand hinged glass door with lock, internal lighting, 6 white shelves
Temperature (°C)	+2 to +12
Volume / Gross	346 ltr./12.3 cu.ft.
Volume / Net	312 ltr./11.1 cu.ft.
Exterior / Interior	Stainless/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 1900
Weight, Packed (kg)	84
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	317 Watt
Connection	230V/50Hz
Connection Load	177 Watt
Power Consumption	1,1 kWh/24h



## COMPACT KG 410 LG C 6W - Refrigerator

Item Number	864110462 (A)
Equipped With	Right hand hinged glass door with lock, internal lighting, 6 white shelves
Temperature (°C)	+2 to +12°C
Volume / Gross	346 ltr./12.3 cu.ft.
Volume / Net	312 ltr./11.1 cu.ft.
Exterior / Interior	Stainless/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 1900
Weight, Packed (kg)	84
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	317 Watt
Connection	230V/50Hz
Connection Load	177 Watt
Power Consumption	1.1 kWh/24h





Product shown with optional feet

## COMPACT KG 410 RG C 10WV - Wine Cooler

Item Number	864110457 (A)
Equipped With	Right hand hinged glass door with lock, internal lighting, 10 white tilted shelves
Temperature (°C)	+2 to +12
Volume / Gross	346 ltr./12.3 cu.ft.
Volume / Net	312 ltr./11.1 cu.ft.
Exterior / Interior	Stainless/ABS lining in white
Dimensions W x D x H (mm)	595 x 640 x 1900
Weight, Packed (kg)	89
Insulation	50mm (cyclopentane)
Refrigerant	R600A (isobutane)
Ref. Capacity at -10°C	317 Watt
Connection	230V/50Hz
Connection Load	177 Watt
Power Consumption	1.1 kWh/24h



**NEW**

# Hoshizaki EURO

Refrigerator & Freezer Range



**ECOFRIENDLY**  
**HFCFREE**



Parts & Labour

# EURO Product Highlights



## Lighting

Bright halogen lamps light up when the door is opened. Simultaneously, the air distribution fan switches off, minimising loss of cold air and saving energy



## Sturdy wire shelves with tilt prevention

The sturdy wire shelves are supported on stainless steel U-rails that prevent the shelves from tilting when pulled out.

Available both in stainless steel and plastic-coated.



## Easy to Use

Self-closing door on all models and foot pedal opener on CX models

## An Advanced Electronic Controller

The electronic controller is your security:

- Digital indication of temperature
- Acoustic door alarm
- The control panel can also be locked against tampering
- Volt-free contacts to allow a remote alarm system to be set up
- M-versions of CX models have dry cool and rapid thaw functions.

Dry cooling reduces the condensation on the surface of the food items. Controlled thawing of frozen food reduces shrinkage and ensures optimal food hygiene.



Full-Height Integrated handle



Standard door Lock

## Unique Air Distribution System

The EURO cabinet maintains a correct and uniform temperature throughout. The cold air is directed down behind the air distribution plate which is positioned on the right of the cabinet. From there, the air circulates around the cabinet and back to the evaporator fan in the top of the cabinet.





# EURO Definitions

## EURO Basic Codes:

<b>K</b>	<b>500</b>	<b>CXG</b>	
			→ <b>G</b> HC gas compressor (R290)
			→ <b>H</b> HFC compressor (chilling R134a, freezing R404A)
			→ <b>F</b> Remote
			→ <b>S</b> Brine / Sole / Glycol
			→ <b>S</b> Standard equipment, plastified shelving, K temp chilling
			→ <b>X</b> Deluxe equipment, stainless shelving, M temp chilling with dry cooling and pedal door opener
			→ <b>C</b> All stainless (except for bottom, back side and compartment)
			→ <b>R</b> Stainless front and internal bottom plate, aluminium sides
			→ <b>L</b> White exterior front and sides, stainless internal bottom plate and internal aluminium sides
			→ <b>500</b> 500 litre gross volume (EURO)
			→ <b>K</b> +2 / +12°C
			→ <b>M</b> -5 / +12°C
			→ <b>F</b> -25 / -5°C

## Equipment Codes

<b>T</b>	Dry cooling option in control panel
<b>R4</b>	Expansion valve for R404A
<b>CW</b>	Water cooled condenser
<b>DL</b>	Left hand hung door
<b>PD</b>	Foot pedal door opener
<b>P</b>	Delivered without legs/castors for mounting on a plinth
<b>C</b>	Castors 125 mm
<b>LL</b>	Low legs 105 / 130 mm (standard legs are 135 - 200 mm)
<b>LH</b>	High legs 185 / 250 mm
<b>3S/8S</b>	Number of shelves in stainless
<b>3N/8N</b>	Number of shelves in plastified (nylon)
<b>E</b>	Schuko plug
<b>U</b>	UK plug
<b>A</b>	Reevaporation tray under cabinet (for remote versions only)



Product shown with optional feet

## EURO M 500 CXG T C 5S - Meat Refrigerator

Item Number	865000102 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 5 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	500 ltr./17.7 cu.ft.
Volume / Net	448 ltr./15.8 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	600 x 806 x 2150
Weight, Packed (kg)	121
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	370 Watt

HFC refrigerant model also available. Item number: 865000102 (B).  
Please contact us for more details.



## EURO F 500 CXG C 5S - Freezer

Item Number	865000202 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 5 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	500 ltr./17.7 cu.ft.
Volume / Net	448 ltr./15.8 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	600 x 806 x 2150
Weight, Packed (kg)	127
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	568 Watt
Connection	230V/50Hz
Connection Load	502 Watt

HFC refrigerant model also available. Item number: 865000202 (B).  
Please contact us for more details.



## EURO K 500 RSG C 5N - Refrigerator

Item Number	865000042 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	500 ltr./17.7 cu.ft.
Volume / Net	448 ltr./15.8 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	600 x 806 x 2150
Weight, Packed (kg)	121
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 865000042 (B).  
Please contact us for more details.



## EURO F 500 RSG C 5N - Freezer

Item Number	865000242 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	500 ltr./17.7 cu.ft.
Volume / Net	448 ltr./15.8 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	600 x 806 x 2150
Weight, Packed (kg)	127
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	568 Watt
Connection	230V/50Hz
Connection Load	502 Watt

HFC refrigerant model also available. Item number: 865000242 (B).  
Please contact us for more details.





## EURO K 500 LSG C 5N - Refrigerator

Item Number	865000062 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	500 ltr./17.7 cu.ft.
Volume / Net	448 ltr./15.8 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	600 x 806 x 2150
Weight, Packed (kg)	121
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 865000062 (B).  
Please contact us for more details.



## EURO F 500 LSG C 5N - Freezer

Item Number	865000262 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	500 ltr./17.7 cu.ft.
Volume / Net	448 ltr./15.8 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	600 x 806 x 2150
Weight, Packed (kg)	127
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	568 Watt
Connection	230V/50Hz
Connection Load	502 Watt

HFC refrigerant model also available. Item number: 865000262 (B).  
Please contact us for more details.



**NEW**

# Hoshizaki GASTRO 07

Counter Refrigerator & Freezer Range



Parts & Labour





## The Gastro 07 Counters

The GASTRO 07 series is 1/1 GN refrigerated and freezer counters that can be used as an island suite, be placed against a wall or under an existing worktop.

The series is available with 2, 3 or 4 refrigerated sections.

The range includes flat and saladette worktops with or without splashback – saladette worktops with insulated or acrylic lids. The cabinet is also available with insulation board only, i.e. without a worktop. Gantry is an optional extra. Each of the refrigerated sections are available with door and drawer sets (freezer counter only with door sets), with or without locks. Also each section is offered with 2 grey wirebaskets, instead of shelves.

Internal and external surfaces are made of stainless steel. The height of the cabinet is 750 mm + the chosen legs/castors. The depth of the worktop is 700 mm. Counters with internal compressor are also available with electric elevation for flexible working height from 850 to 1050 mm.

# GASTRO o7 Product Highlights



## Doors and Drawers in a Sturdy, Easy to Clean Design

- Reversible doors and drawers are available with or without locks.
- Sturdy drawers allow bottles and covered foodstuffs to be placed directly on the bottom.
- The drawers are easily removable for cleaning.
- All metal parts are made of stainless steel.
- Note: Drawers are not available for freezer counters.



## Telescopic Drawer Rails

- Allow GN pans to be lifted in and out without tilting.

## Easy to Use

- The insulated lid fitted to the saladette worktop keeps the food in the GN-pans chilled.
- In the 'open' position, the lid is fixed and the pans can be lifted in and out without tilting.

## Finish

Minimal screws and fixings and rounded corners optimise hygiene for the insulated lid

## Adaptable working environment

The Gastro o7 counter series also offers the option of electronic elevation.





## As Unique As Your Work Environment

GASTRO o7 refrigerated counters are acknowledged as premium quality, prioritising hygiene, the uniqueness of your work environment and the best modern refrigeration technology and design.

### Hygiene

Professional kitchen staff, the customer and environmental health officers naturally demand the very highest standards of hygiene. The GASTRO o7 helps today's busy commercial kitchen to meet these demands:

- Stainless steel both inside and outside
- All counter tops come with a "drip nose edge"
- Worktops with splash backs
- Inside base is shaped as a dished pan
- Minimal screws and fixings and rounded corners

### Working Environment

The counter has to fulfill a variety of functions in an efficient and user-friendly manner. The modern workstation should provide ergonomic solutions for food preparation and cleaning, service and maintenance. Examples include:

- Anti-tilt shelves and pull-out stops on drawers
- Removable drawer and door gaskets
- Extra long drawer telescope rails
- Choice of castors or legs of alternative heights
- Electronic elevation for an entirely flexible working height

### Modern Refrigeration Technology and Design

Through functional technology and modern design, the GASTRO o7 range represents the latest generation of refrigeration and freezer cabinets.

Quality features include:

- Exceptional energy efficiency
- Use of natural refrigerants and insulation materials
- Intelligent digital control
- A compact slide out refrigeration unit.
- Minimal noise
- Modular design



## GASTRO o7 Definitions

### GASTRO o7 Basic Codes:

**K 1407 CSG**

<b>G</b>	HC gas compressor (R290)
<b>H</b>	HFC compressor (chilling R134a, freezing R404A)
<b>F</b>	Remote
<b>S</b>	Brine / Sole / Glycol
<b>CS</b>	All stainless (except bottom plate and compartment)
<b>1407</b>	Two section counter
<b>1807</b>	Three section counter
<b>2207</b>	Four section counter
<b>K</b>	+2 / +12°C
<b>M</b>	-5 / +12°C
<b>F</b>	-25 / -5°C





## Equipment Codes

<b>A</b>	Standard worktop
<b>A5</b>	Standard worktop with a 50 mm splashback
<b>A1</b>	Standard worktop with a 100 mm splashback
<b>B</b>	Insulating board
<b>U</b>	Without top/insulation
<b>S</b>	Worktop with saladette cut out suitable for 1/3 GN pans
<b>S5</b>	Worktop with a 50 mm splashback, with saladette cut out suitable for 1/3 GN pans
<b>-L</b>	Insulated hinged night lid in stainless steel for saladette cut out
<b>O</b>	Upstand with double upper shelf
<b>-PL</b>	Acrylic night lid(s) for saladette cut out
<b>GP</b>	Gastro pan set
<b>WB</b>	Wooden cutting board
<b>WP</b>	Plastic cutting board
<b>LC</b>	Lock per door/drawer piece
<b>DR</b>	Right hand hung door
<b>DL</b>	Left hand hung door
<b>2D</b>	Set of 2 x 1/2 drawers
<b>3D</b>	Set of 3 x 1/3 drawers
<b>L1</b>	Legs for counter height 850 mm, leg height 100 - 135 mm (counter height 849 - 874 mm)
<b>L2</b>	Legs for counter height 900 mm, leg height 135 - 200 mm (counter height 884 - 949 mm)
<b>L3</b>	Legs for counter height 950 mm, leg height 185 - 250 mm (counter height 934 - 999 mm)
<b>C1</b>	Castors for counter height 876 mm, castor height 127 mm
<b>C2</b>	Castors for counter height 904 mm, castor height 155 mm
<b>C3</b>	Castors for counter height 926 mm, castor height 127 mm + console height 50 mm
<b>C4</b>	Castors for counter height 954 mm, castor height 155 mm + console height 50 mm
<b>C1S</b>	Castors, stainless, for counter height 876 mm, castor height 127 mm
<b>C2S</b>	Castors, stainless, for counter height 904 mm, castor height 155 mm
<b>C3S</b>	Castors, stainless, for counter height 926 mm, castor height 127 mm + console height 50 mm
<b>C4S</b>	Castors, stainless, for counter height 954 mm, castor height 155 mm + console height 50 mm
<b>P</b>	Prepared for plinth mounting
<b>V</b>	Motorized actuator, height 850 - 1050 mm
<b>U</b>	UK plug
<b>E</b>	Schuko plug



## K 1407 CSG A DL/DR C2 - Refrigerated

Item Number	861400022 (A)
Equipped With	Stainless steel solid top, 2 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	345 ltr./12.2 cu.ft.
Volume / Net	255 ltr./9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1289 x 700 x 905 mm
Weight, Packed (kg)	124
Insulation	50 mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt
Connection	230V/50Hz
Connection load	262 Watt

HFC refrigerant model also available. Item number: 861400022 (B).  
Please contact us for more details.



## F 1407 CSG A DL/DR C2 - Freezer

Item Number	861400222 (A)
Equipped With	Stainless steel solid top, 2 door sections each with 2 stainless shelves
Temperature (°C)	-25 to -5
Volume / Gross	345 ltr./12.2 cu.ft.
Volume / Net	255 ltr./9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1289 x 700 x 905
Weight, Packed (kg)	124
Insulation	50 mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	714 Watt
Connection	230V/50Hz
Connection load	668 Watt

HFC refrigerant model also available. Item number: 861400222 (B).  
Please contact us for more details.





## K 18o7 CSG A DL/DL/DR C2 - Refrigerated

Item Number	861800022 (A)
Equipped With	Stainless steel solid top, 3 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	506 ltr./17.9 cu.ft.
Volume / Net	397 ltr./14 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1726 x 700 x 905
Weight, Packed (kg)	158
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	400 Watt
Connection	230V/50Hz
Connection load	333 Watt

HFC refrigerant model also available. Item number: 861800022 (B).  
Please contact us for more details.



## F 18o7 CSG A DL/DL/DR C2 - Freezer

Item Number	861800222 (A)
Equipped With	Stainless steel solid top, 3 door sections each with 2 stainless shelves
Temperature (°C)	-25 to -5
Volume / Gross	506 ltr./17.9 cu.ft.
Volume / Net	397 ltr./14 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1726 x 700 x 905
Weight, Packed (kg)	158
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	714 Watt
Connection	230V/50Hz
Connection load	675 Watt

HFC refrigerant model also available. Item number: 861800222 (B).  
Please contact us for more details.





## K 2207 CSG A DL/DL/DL/DR C2 - Refrigerated

Item Number	862200022 (A)
Equipped With	Stainless steel solid top, 4 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	668 ltr./23.6 cu.ft.
Volume / Net	539 ltr./19 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2163 x 700 x 905
Weight, Packed (kg)	189
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	487 Watt
Connection	230V/50Hz
Connection load	385 Watt

HFC refrigerant model also available. Item number: 862200022 (B).  
Please contact us for more details.



## F 2207 CSG A DL/DL/DL/DR C2 - Freezer

Item Number	862200222 (A)
Equipped With	Stainless steel solid top, 4 door sections each with 2 stainless shelves
Temperature (°C)	-25 to -5
Volume / Gross	668 ltr./23.6 cu.ft.
Volume / Net	539 ltr./19 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2163 x 700 x 905
Weight, Packed (kg)	189
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	830 Watt
Connection	230 V/50Hz
Connection load	772 Watt

HFC refrigerant model also available. Item number: 862200222 (B).  
Please contact us for more details.





## K 1407 CSG SL DL/DR C2

Model 31	86-140-0072 (A)
Cut Out Size W x D (mm)	688 x 305

HFC refrigerant model also available. Item number: 86-140-0072 (B).  
Please contact us for more details.



## K 1807 CSG SL DL/DL/DR C2

Model 32	86-180-0072 (A)
Cut Out Size W x D (mm)	1219 x 305

HFC refrigerant model also available. Item number: 86-180-0072 (B).  
Please contact us for more details.



## K 2207 CSG SL DL/DL/DL/DR C2

Model 33	86-220-0072 (A)
Cut Out Size W x D (mm)	1575 x 305

HFC refrigerant model also available. Item number: 86-220-0072 (B).  
Please contact us for more details.



## M 1807 CSG A DL/DL/DR C2 - Meat Refrigerated Counter

Item Number	861800122 (A)
Equipped With	Stainless steel solid top, 3 door sections each with 2 stainless shelves
Temperature (°C)	-5 to +12
Volume / Gross	506 ltr./17.9 cu.ft.
Volume / Net	397 ltr./14 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1726 x 700 x 905
Weight, Packed (kg)	158
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	487 Watt
Connection	230V/50Hz
Connection load	456 Watt

HFC refrigerant model also available. Item number: 861800122 (B).  
Please contact us for more details.



## M 2207 CSG A DL/DL/DL/DR C2 - Meat Refrigerated Counter

Item Number	862200122 (A)
Equipped With	Stainless steel solid top, 4 door sections each with 2 stainless shelves
Temperature (°C)	-5 to +12
Volume / Gross	668 ltr./23.6 cu.ft.
Volume / Net	539 ltr./19 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2163 x 700 x 905 mm
Weight, Packed (kg)	189
Insulation	50 mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	574 Watt
Connection	230 V, 50 Hz
Connection load	500 Watt

HFC refrigerant model also available. Item number: 862200122 (B).  
Please contact us for more details.





## K 1407 CSG PT DL/DR C2\*

Model 34

86-140-0948 (A)

HFC refrigerant model also available. Item number: 86-140-0948 (B).  
Please contact us for more details.



## K 1807 CSG PT DL/DL/DR C2\*

Model 35

86-180-1174 (A)

HFC refrigerant model also available. Item number: 86-180-1174 (B).  
Please contact us for more details.



## K 2207 CSG PT DL/DL/DL/DR C2\*

Model 36

86-220-0983 (A)

HFC refrigerant model also available. Item number: 86-220-0983 (B).  
Please contact us for more details.

## GASTRO o7

Technical specifications:	Temp.range	Approved for	Refrigerant
Refrigeration	+2 to +12° C	40° C	R290 (HC, Green) or R134a
Refrigeration, brine	+2 to +12° C	40° C	Brine
Extended refrigeration	-5 to +12° C	40° C	R290 (HC, Green) or R134a
Freezing	-25 to -5° C	30° C	R290 (HC, Green) or R404A



**NEW**

# Hoshizaki GASTRO o8

Counter Refrigerator & Freezer Range



Parts & Labour



## The Gastro o8 Counters

The GASTRO o8 range is 2/1 GN refrigerated and freezer counters that can be used as an island suite, be placed against a wall or under an existing worktop.

The series is available with 2 or 3 refrigerated sections.

The range includes flat worktops with or without splash back and saladette worktops with insulated or acrylic lids. The cabinet is also available with insulation board only, i.e. without a worktop. Gantry is an optional extra. Each of the refrigerated sections is available with door sets, with or without locks. Also each section is offered with 9 bakery support sets, instead of shelves.

Internal and external surfaces are made of stainless steel. The height of the cabinet is 750 mm + the chosen legs/castors. The depth of the worktop is 800 mm. Counters with internal compressor are also available with electric elevation for flexible working height from 850 to 1050 mm. Choose between refrigeration +2 to +12 °C, extended refrigeration -5 to +12 °C or freezing -25 to -5 °C.





# GASTRO o8 Product Highlights



## Gantry

Essential when preparing and serving meals

Gantry with 2 shelves is available for all saladettes.



## An Advanced Electronic Controller

- The electronic controller is your security providing accurate digital indication of temperature. The control panel can also be locked against tampering.
- Volt-free contacts to allow a remote alarm system to be set up.

## Large Work-station

- Pass-through counters with doors on two sides offer even better access and enable it to be used as a double work station.
- Only refrigerated counters are offered as pass-through counters.



## Door Lock

Optional lockable doors.



## “Drip Nose Edge”

All counter tops come with a “drip nose edge” preventing ingress of water.



## Easy to Clean

- Removable drawer and door gaskets – for easy cleaning.
- Base shaped as a dished pan to catch fluids.







## As Individual As Your Environment

### Hygiene

Professional kitchen staff, the customer and environmental health officers naturally demand the very highest standards of hygiene. Hoshizaki's GASTRO o8 helps today's busy kitchen to meet these demands:

- Stainless steel both inside and outside
- All counter tops come with a "drip nose edge"
- Worktops with splash backs
- Inside base is shaped as a dished pan
- Minimal screws and fixings and rounded corners

### Working Environment

The counter has to deliver a variety of functions in an efficient and user-friendly manner.

The modern workstation should provide ergonomic solutions for food preparation and cleaning, service and maintenance.

Some examples are:

- Anti-tilt shelves
- Removable door gaskets
- Doors on one or two (only refrigeration counters) sides
- Choice of castors or legs of alternative heights
- Electronic elevation for an entirely flexible working height

### Modern Refrigeration Technology and Design

The GASTRO o8 range offers technology and design that progresses the latest generation of refrigeration and freezer cabinets. Quality features such as:

- Energy efficiency
- Use of natural refrigerants and insulation materials
- Intelligent digital control
- A compact slide out refrigeration unit with minimal noise
- Modular design



# GASTRO o8 Definitions

## GASTRO o8 Basic Codes:

<b>K</b>	<b>18o8</b>	<b>CSG</b>	
			→ <b>G</b> HC gas compressor (R290)
			→ <b>H</b> HFC compressor (chilling R134a, freezing R404A)
			→ <b>F</b> Remote
			→ <b>S</b> Brine / Sole / Glycol
			→ <b>CS</b> All stainless (except bottom plate and compartment)
			→ <b>18o8</b> Two section counter
			→ <b>24o8</b> Tree section counter
			→ <b>K</b> +2 / +12°C
			→ <b>M</b> -5 / +12°C
			→ <b>F</b> -25 / -5°C

## Optional Equipment

Code	Description
<b>A</b>	Flat worktop
<b>A5</b>	Flat worktop with 50 mm splashback
<b>B</b>	Insulating board - without worktop
<b>S</b>	Saladette worktop - without night lid
<b>PL</b>	Perspex night lid for saladette
<b>SL</b>	Saladette worktop with insulated hinged night lid
<b>O</b>	Gantry with 2 shelves
<b>LC</b>	Locks
<b>DR</b>	Door section, right hand hinged, reversible, including 2 stainless shelves
<b>DL</b>	Door section, left hand hinged, reversible, incl. 2 stainless shelves
<b>C1</b>	Castors, H = 127 mm, for counter height 877 mm
<b>C2</b>	Castors, H = 155 mm, for counter height 905 mm
<b>C3</b>	Castors, H = 177 mm, for counter height 927 mm
<b>C4</b>	Castors, H = 205 mm, for counter height 955 mm
<b>L1</b>	Legs, H = 100 / 135 mm, for counter height 850 / 885 mm
<b>L2</b>	Legs, H = 135 / 200 mm, for counter height 885 / 950 mm
<b>L3</b>	Legs, H = 185 / 250 mm, for counter height 935 / 1000 mm
<b>P</b>	Cabinet prepared for plinth mounting
<b>V</b>	Electronic elevation H = 850 - 1050 mm, ergonomic flexibility for built-in compressor versions
<b>VF</b>	Electronic elevation H = 850 - 1050 mm, ergonomic flexibility for remote compressor versions



## K 18o8 CSG A DL DR C2 U - Refrigerated

Item Number	861810022 (A)
Equipped With	Stainless steel solid top, 2 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	586 ltr./20.7 cu.ft.
Volume / Net	457 ltr./16.1 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1700 x 800 x 905
Weight, Packed (kg)	184
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	324 Watt
Connection	230V/50Hz
Connection load	357 Watt

HFC refrigerant model also available. Item number: 861810022 (B).  
Please contact us for more details.



## F 18o8 CSG A DL DR C2 U - Freezer

Item Number	861810222 (A)
Equipped With	Stainless steel solid top, 2 door sections each with 2 stainless shelves
Temperature (°C)	-25 to -5
Volume / Gross	586 ltr./20.7 cu.ft.
Volume / Net	457 ltr./16.1cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1700 x 800 x 905
Weight, Packed (kg)	184
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	615 Watt
Connection	230V/50Hz
Connection load	695 Watt

HFC refrigerant model also available. Item number: 861810222 (B).  
Please contact us for more details.



## K 24o8 CSG A DL DL DR C2 - Refrigerated

Item Number	862410022 (A)
Equipped With	Stainless steel solid top, 3 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	865 ltr./30.5 cu.ft.
Volume / Net	702 ltr./24.8cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2340 x 800 x 905
Weight, Packed (kg)	212
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	395 Watt
Connection	230V/50Hz
Connection load	409 Watt



HFC refrigerant model also available. Item number: 862410022 (B).  
Please contact us for more details.

## F 24o8 CSG A DL DL DR C2 U - Freezer

Item Number	862410222 (A)
Equipped With	Stainless steel solid top, 3 door sections each with 2 stainless shelves
Temperature (°C)	-25 to -5
Volume / Gross	865 ltr./30.5 cu.ft.
Volume / Net	702 ltr./24.8cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2340 x 800 x 905
Weight, Packed (kg)	215
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	715 Watt
Connection	230V/50Hz
Connection load	794 Watt



HFC refrigerant model also available. Item number: 862410222 (B).  
Please contact us for more details.



## K 18o8 CSG SL DL DR C2 U - Saladete Counter

Item Number	861810072 (A)
Equipped With	Stainless steel solid top with cut out for GN pans, 2 door sections each with 2 stainless shelves, fitted hinged lid
Temperature (°C)	+2 to +12
Volume / Gross	586 ltr./20.7 cu.ft.
Volume / Net	457 ltr./16.1 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1700 x 800 x 905
Cut Out Size W x D (mm)	1042 x 305
Weight, Packed (kg)	184
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	324 Watt
Connection	230V/50Hz
Connection load	357 Watt

HFC refrigerant model also available. Item number: 861810072 (B).  
Please contact us for more details.



## K 24o8 CSG SL DL DL DR C2 U - Saladete Counter

Item Number	862410072 (A)
Equipped With	Stainless steel solid top with cut out for GN pans, 3 door sections each with 2 stainless shelves, fitted hinged lid
Temperature (°C)	+2 to +12
Volume / Gross	865 ltr./30.5 cu.ft.
Volume / Net	702 ltr./24.8 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2340 x 800 x 905
Cut Out Size W x D (mm)	1575 x 305
Weight, Packed (kg)	212
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	395 Watt
Connection	230V/50Hz
Connection load	409 Watt

HFC refrigerant model also available. Item number: 861810072 (B).  
Please contact us for more details.



## K 18o8 D CSG S OPL DL DR C2 U - Pass Through Refrigerated Counter

Item Number	861820072 (A)
Equipped With	Stainless steel solid top with cut out for GN pans, perspex lid and gantry, 2 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	586 ltr./20.7 cu.ft.
Volume / Net	457 ltr./16.1 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1700 x 870 x 905
Cut Out Size W x D (mm)	1042 x 305
Weight, Packed (kg)	204
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	324 Watt
Connection	230V/50Hz
Connection load	357 Watt

HFC refrigerant model also available. Item number: 861820072 (B).  
Please contact us for more details.



## K 24o8 D CSG S OPL DL DL DR C2 U - Pass Through Refrigerated Counter

Item Number	862420072 (A)
Equipped With	Stainless steel solid top with cut out for GN pans, perspex lid and gantry, 3 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	865 ltr./30.5 cu.ft.
Volume / Net	702 ltr./24.8 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2340 x 870 x 905
Cut Out Size W x D (mm)	1575 x 305
Weight, Packed (kg)	242
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	395 Watt
Connection	230V/50Hz
Connection load	409 Watt

HFC refrigerant model also available. Item number: 861820072 (B).  
Please contact us for more details.





## M 18o8 CSG A DL DR C2 U - Meat Refrigerated Counter

Item Number	861810122 (A)
Equipped With	Stainless steel solid top, 2 door sections each with 2 stainless shelves
Temperature (°C)	-5 to +12
Volume / Gross	586 ltr./20.7 cu.ft.
Volume / Net	457 ltr./16.1cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1700 x 800 x 905
Weight, Packed (kg)	184
Insulation	50 mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	395 Watt
Connection	230V/50Hz
Connection load	476 Watt

HFC refrigerant model also available. Item number: 861810122 (B).  
Please contact us for more details.



## M 24o8 CSG A DL DL DR C2 U - Meat Refrigerated Counter

Item Number	862410122 (A)
Equipped With	Stainless steel solid top, 3 door sections each with 2 stainless shelves
Temperature (°C)	-5 to +12
Volume / Gross	865 ltr./30.5 cu.ft.
Volume / Net	702 ltr./24.8cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2340 x 800 x 905
Weight, Packed (kg)	212
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	464 Watt
Connection	230/50Hz
Connection load	522 Watt

HFC refrigerant model also available. Item number: 862410122 (B).  
Please contact us for more details.





## K 18o8 D CSG A DL DR C2 U - Pass Through Refrigerated Counter

Item Number	861820022 (A)
Equipped With	Stainless steel solid top, 2 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	586 ltr./20.7 cu.ft.
Volume / Net	457 ltr./16.1 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1700 x 870 x 905
Weight, Packed (kg)	204
Insulation	50 mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	324 Watt
Connection	230V/50Hz
Connection load	357 Watt

HFC refrigerant model also available. Item number: 861820022 (B).  
Please contact us for more details.



## K 24o8 D CSG A DL DL DR C2 U - Pass Through Refrigerated Counter

Item Number	862420022 (A)
Equipped With	Stainless steel solid top, 3 door sections each with 2 stainless shelves
Temperature (°C)	+2 to +12
Volume / Gross	865 ltr./30.5 cu.ft.
Volume / Net	702 ltr./24.8 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	2340 x 870 x 905
Weight, Packed (kg)	242
Insulation	50mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	395 Watt
Connection	230V/50Hz
Connection load	409 Watt

HFC refrigerant model also available. Item number: 862420022 (B).  
Please contact us for more details.



**GASTRO o8**

Technical specifications:	Temp.range	Approved for	Refrigerant
Refrigeration	+2 to +12° C	40° C	R290 (HC, Green) or R134a
Refrigeration, brine	+2 to +12° C	40° C	Brine
Extended refrigeration	-5 to +12° C	40° C	R290 (HC, Green) or R134a
Freezing	-25 to -5° C	30° C	R290 (HC, Green) or R404A



**NEW**

# Hoshizaki MIDI

## Refrigerator & Freezer Range



**ECOFRIENDLY**  
**HFCFREE**




Parts & Labour

# MIDI Product Highlights



## Lighting

Bright halogen lamps light up when the door is opened. Simultaneously, the air distribution fan switches off, minimising loss of cold air and saving energy

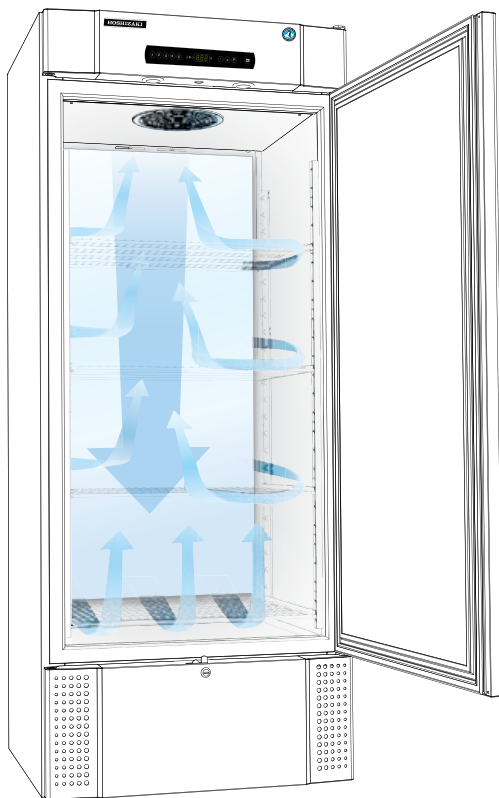

## Unique Air Distribution System

The MIDI cabinet maintains an accurate and uniform temperature throughout. The cold air is directed down behind the air distribution plate which is positioned at the back of the cabinet. From there, it circulates around the cabinet and back to the evaporator fan in the top of the cabinet.

## An Advanced Electronic Controller

The electronic controller is your security:

- Digital indication of temperature
- Acoustic door alarm
- The control panel can also be locked against tampering
- Volt-free contacts to allow a remote alarm system to be set up
- M-versions of CX models have dry cool and rapid thaw functions.

Dry cooling reduces the condensation on the surface of the food items. Controlled thawing of frozen food reduces shrinkage and ensures optimal food hygiene.



## Sturdy wire shelves with tilt prevention

The sturdy wire shelves are supported on stainless steel U-rails that prevent the shelves from tilting when pulled out.

These are available both in stainless steel and plastic-coated.

## Standard Door Lock

All models have a door lock as standard – providing extra security as only authorised staff can have access to the contents.



## Ergonomic design. Bottom mounted refrigeration unit

The storage compartment is raised above the floor, which provides easy access to the stored items. All models are supplied with castors.



Full-Height Integrated Handle



# MIDI Definitions

## MIDI Basic Codes:

<b>K</b>	<b>425</b>	<b>CSG</b>	
			→ <b>G</b> HC gas compressor (R290)
			→ <b>H</b> HFC compressor (chilling R134a, freezing R404A)
			→ <b>F</b> Remote
			→ <b>S</b> Brine / Sole / Glycol
			→ <b>S</b> Standard equipment, plastified shelving, K temp chilling
			→ <b>C</b> All stainless (except for bottom, back side and compartment)
			→ <b>R</b> Stainless front and internal bottom plate, aluminium sides
			→ <b>L</b> White exterior front and sides, stainless internal bottom plate and internal aluminium sides
			→ <b>425</b> 425 litre gross volume
			→ <b>625</b> 625 litre gross volume
			→ <b>K</b> +2 / +12°C
			→ <b>M</b> -5 / +12°C
			→ <b>F</b> -25 / -5°C

## Equipment Codes

<b>T</b>	Dry cooling option in control panel
<b>R4</b>	Expansion valve for R404A
<b>CW</b>	Water cooled condenser
<b>DL</b>	Left hand hung door
<b>PD</b>	Foot pedal door opener
<b>P</b>	Delivered without legs/castors for mounting on a plinth
<b>C</b>	Castors 125 mm
<b>LL</b>	Low legs 105 / 130 mm (standard legs are 135 - 200 mm)
<b>LH</b>	High legs 185 / 250 mm
<b>3S/8S</b>	Number of shelves in stainless
<b>3N/8N</b>	Number of shelves in plastified (nylon)
<b>E</b>	Schuko plug
<b>U</b>	UK plug
<b>A</b>	Reevaporation tray under cabinet (for remote versions only)



## MIDI M 425 CXG T 4S - Meat Refrigerator

Item Number	864250102 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	114
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	226 Watt
Connection	230/50Hz
Connection Load	260 Watt

**Please note:** Can be equipped as Fish Cabinet - See page(s) e1.11  
HFC refrigerant model also available. Item number: 864250102 (B).  
Please contact us for more details.



## MIDI F 425 CXG 4S - Freezer

Item Number	864250202 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	-25 to -5°C
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	117
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	365 Watt
Connection	230V/50Hz
Connection Load	421 Watt

HFC refrigerant model also available. Item number: 864250202 (B).  
Please contact us for more details.

# MIDI - Gastronorm Cabinets, 60cm Width

www.hoshizaki-europe.com



## MIDI K 425 RSG 4N - Refrigerator

Item Number	864250042 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	114
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	226 Watt
Connection	230V/50Hz
Connection Load	251 Watt

HFC refrigerant model also available. Item number: 864250042 (B).  
Please contact us for more details.



## MIDI F 425 RSG 4N - Freezer

Item Number	864250242 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	117
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	365 Watt
Connection	230V/50Hz
Connection Load	421 Watt

HFC refrigerant model also available. Item number: 864250242 (B).  
Please contact us for more details.







## MIDI K 425 LSG 4N - Refrigerator

Item Number	864250062 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	114
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	226 Watt
Connection	230V/50Hz
Connection Load	251 Watt

HFC refrigerant model also available. Item number: 864250062 (B).  
Please contact us for more details.



## MIDI F 425 LSG 4N - Freezer

Item Number	864250262 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	117
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	365 Watt
Connection	230V/50Hz
Connection Load	421 Watt

HFC refrigerant model also available. Item number: 864250262 (B).  
Please contact us for more details.



## MIDI KG 425 LSG 4W - Refrigerator

Item Number	864260362 (A)
Equipped With	Right hand hinged glass door with lock, automatic door closing, internal light, 4 white shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	White/Stainless, white
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	124
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	298 Watt
Connection	230V/50Hz
Connection Load	331 Watt

HFC refrigerant model also available. Item number: 864260362 (B).  
Please contact us for more details.



## MIDI FG 425 LSG 4W - Freezer

Item Number	864260462 (A)
Equipped With	Right hand hinged glass door with lock, automatic door closing, internal light, 4 white shelves, castors
Temperature (°C)	-20 to -5
Volume / Gross	425 ltr./15.0 cu.ft.
Volume / Net	388 ltr./13.7 cu.ft.
Exterior / Interior	White/Stainless, white
Dimensions W x D x H (mm)	600 x 731 x 2000
Weight, Packed (kg)	127
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	615 Watt
Connection	230V/50Hz
Connection Load	667 Watt

HFC refrigerant model also available. Item number: 864260462 (B).  
Please contact us for more details.





## MIDI M 625 CXG T 4S - Meat Refrigerator

Item Number	866250102 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 731 x 2000
Weight, Packed (kg)	121
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	360 Watt

HFC refrigerant model also available. Item number: 866250102 (B).  
Please contact us for more details.



## MIDI F 625 CXG 4S - Freezer

Item Number	866250202 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 731 x 2000
Weight, Packed (kg)	128
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866250202 (B).  
Please contact us for more details.

# MIDI - Gastronorm Cabinets, 60cm Width

www.hoshizaki-europe.com



## MIDI K 625 RSG 4N - Refrigerator

Item Number	866250042 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	815 x 731 x 2000
Weight, Packed (kg)	121
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	234 Watt

HFC refrigerant model also available. Item number: 866250042 (B).  
Please contact us for more details.



## MIDI F 625 RSG 4N - Freezer

Item Number	866250242 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	815 x 731 x 2000
Weight, Packed (kg)	128
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866250242 (B).  
Please contact us for more details.





## MIDI K 625 LSG 4N - Refrigerator

Item Number	866250062 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	815 x 731 x 2000
Weight, Packed (kg)	121
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	234 Watt

HFC refrigerant model also available. Item number: 866250062 (B).  
Please contact us for more details.



## MIDI F 625 LSG 4N - Freezer

Item Number	866250262 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	815 x 731 x 2000
Weight, Packed (kg)	128
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866250262 (B).  
Please contact us for more details.



## MIDI KG 625 LSG 4W - Refrigerator

Item Number	866260362 (A)
Equipped With	Right hand hinged glass door with lock, automatic door closing, internal light, 4 white shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	White/Stainless, white
Dimensions W x D x H (mm)	815 x 731 x 2000
Weight, Packed (kg)	131
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	298 Watt
Connection	230V/50Hz
Connection Load	381 Watt

HFC refrigerant model also available. Item number: 866260362 (B).  
Please contact us for more details.



## MIDI FG 625 LSG 4W - Freezer

Item Number	866260462 (A)
Equipped With	Right hand hinged glass door with lock, automatic door closing, internal light, 4 white shelves, castors
Temperature (°C)	-20 to -5°C
Volume / Gross	625 ltr./22.1 cu.ft.
Volume / Net	571 ltr./20.2 cu.ft.
Exterior / Interior	White/Stainless, white
Dimensions W x D x H (mm)	815 x 731 x 2000 mm
Weight, Packed (kg)	138
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	715 Watt
Connection	230V/50Hz
Connection Load	812 Watt

HFC refrigerant model also available. Item number: 866260462 (B).  
Please contact us for more details.







**NEW**

# Hoshizaki PLUS

Refrigerator & Freezer Range



**ECOFRIENDLY  
HFCFREE**



Parts & Labour

# PLUS Product Highlights



## Lighting

Bright halogen lamps light up when the door is opened. Simultaneously, the air distribution fan switches off, minimising loss of cold air.



## Sturdy wire shelves with tilt prevention

The sturdy wire shelves are supported on stainless steel U-rails that prevent the shelves from tilting when pulled out.

These are available both in stainless steel and plastic-coated.



## Easy to use


Self-closing door on all models and foot pedal opener.

## Advanced Electronic Controller

The electronic controller is your security:

- Digital indication of temperature
- Acoustic door alarm
- The control panel can also be locked against tampering
- Volt-free contacts to allow a remote alarm system to be set up
- M-versions of CX models have dry cool and rapid thaw functions.

Dry cooling reduces the condensation on the surface of the food items. Controlled thawing of frozen food reduces shrinkage and ensures optimal food hygiene.

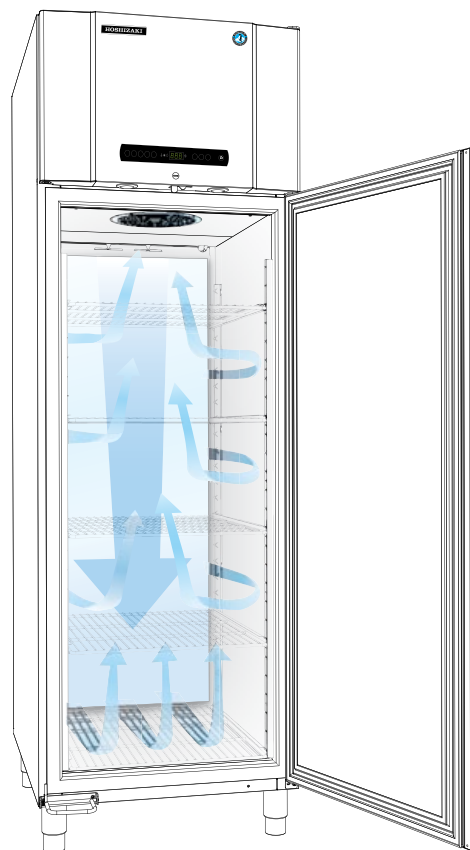

## Unique Air Distribution System

The PLUS cabinet maintains a correct and uniform temperature throughout. The cold air is directed down behind the air distribution plate which is positioned at the back of the cabinet. From there, it circulates around the cabinet and back to the evaporator fan in the top of the cabinet.



Full-Height Integrated handle



Standard door Lock



# PLUS Definitions

## PLUS Basic Codes:

<b>K</b>	<b>600</b>	<b>CXG</b>	
			→ <b>G</b> HC gas compressor (R290)
			→ <b>H</b> HFC compressor (chilling R134a, freezing R404A)
			→ <b>F</b> Remote
			→ <b>S</b> Brine / Sole / Glycol
			→ <b>S</b> Standard equipment, plastified shelving, K temp chilling
			→ <b>X</b> Deluxe equipment, stainless shelving, M temp chilling with dry cooling and pedal door opener
			→ <b>C</b> All stainless (except for bottom, back side and compartment)
			→ <b>R</b> Stainless front and internal bottom plate, aluminium sides
			→ <b>L</b> White exterior front and sides, stainless internal bottom plate and internal aluminium sides
			→ <b>600</b> 600 litre gross volume
			→ <b>660</b> 660 litre gross volume
			→ <b>1270</b> 1270 litre gross volume
			→ <b>1400</b> 1400 litre gross volume
			→ <b>K</b> +2 / +12°C
			→ <b>M</b> -5 / +12°C
			→ <b>F</b> -25 / -5°C

## Equipment Codes

<b>T</b>	Dry cooling option in control panel
<b>R4</b>	Expansion valve for R404A
<b>CW</b>	Water cooled condenser
<b>DL</b>	Left hand hung door
<b>PD</b>	Foot pedal door opener
<b>P</b>	Delivered without legs/castors for mounting on a plinth
<b>C</b>	Castors 125 mm
<b>LL</b>	Low legs 105 / 130 mm (standard legs are 135 - 200 mm)
<b>LH</b>	High legs 185 / 250 mm
<b>3S/8S</b>	Number of shelves in stainless
<b>3N/8N</b>	Number of shelves in plastified (nylon)
<b>E</b>	Schuko plug
<b>U</b>	UK plug
<b>A</b>	Reevaporation tray under cabinet (for remote versions only)



Product shown with optional feet

## PLUS M 600 CXG T C 4S - Meat Refrigerator

Item Number	866000102 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 4 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	695 x 876 x 2000
Weight, Packed (kg)	113
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	420 Watt

HFC refrigerant model also available. Item number:866000102 (B).

Please contact us for more details.



## PLUS F 600 CXG C 4S - Freezer

Item Number	866000202 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 4 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	695 x 876 x 2000
Weight, Packed (kg)	120
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866000202 (B).

Please contact us for more details.

# PLUS - Gastronorm Cabinets 2/1 GN Deep

www.hoshizaki-europe.com



## PLUS K 600 RSG C 4N - Refrigerator

Item Number	866000042 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	695 x 876 x 2000
Weight, Packed (kg)	113
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 866000042 (B).  
Please contact us for more details.



Product shown with optional feet

## PLUS F 600 RSG C 4N - Freezer

Item Number	866000242 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	695 x 876 x 2000
Weight, Packed (kg)	120
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866000242 (B).  
Please contact us for more details.





## PLUS KG 600 CXG C 4S - Refrigerator

Item Number	866020302 (A)
Equipped With	Right hand hinged glass door with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	695 x 876 x 2000 mm
Weight, Packed (kg)	123
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 866020302 (B).  
Please contact us for more details.



## PLUS KG 600 RSG C 4N - Refrigerator

Item Number	866020342 (A)
Equipped With	Right hand hinged glass door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	695 x 876 x 2000
Weight, Packed (kg)	123
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 866020342 (B).  
Please contact us for more details.





## PLUS M 66o CXG T C 5S - Meat Refrigerator

Item Number	866600102 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 5 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	695 x 876 x 2150
Weight, Packed (kg)	124
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	420 Watt

HFC refrigerant model also available. Item number: 866600102 (B).  
Please contact us for more details.



Product shown with optional feet

## PLUS F 66o CXG C 5S - Freezer

Item Number	866600202 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 5 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	695 x 876 x 2150
Weight, Packed (kg)	130
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant also available, please contact us for more details  
Item number: 866600202 (B)





## PLUS K 66o RSG C 5N - Refrigerator

Item Number	866600042 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	695 x 876 x 2150
Weight, Packed (kg)	124
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 866600042 (B).

Please contact us for more details



## PLUS F 66o RSG C 5N - Freezer

Item Number	866600242 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	695 x 876 x 2150
Weight, Packed (kg)	130
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866600242 (B).

Please contact us for more details.



## PLUS K 66o LSG C 5N - Refrigerator

Item Number	866600062 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	695 x 876 x 2150
Weight, Packed (kg)	124
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 866600062 (B).  
Please contact us for more details.



## PLUS F 66o LSG C 5N - Freezer

Item Number	866600262 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	695 x 876 x 2150 mm
Weight, Packed (kg)	130
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866600262 (B).  
Please contact us for more details.





## PLUS M 1270 CXG T C 8S - Meat Refrigerator

Item Number	862700102 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, pedal door opener, 8 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	1270 ltr./44.8 cu.ft.
Volume / Net	1020 ltr./36.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1390 x 876 x 2000
Weight, Packed (kg)	249
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	568 Watt
Connection	230V/50Hz
Connection Load	870 Watt

HFC refrigerant available also available. Item number: 862700102 (B).  
Please contact us for more details.



## PLUS F 1270 CXG C 8S - Freezer

Item Number	862700202 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, pedal door opener, 8 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	1270 ltr./44.8 cu.ft.
Volume / Net	1020 ltr./36.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1390 x 876 x 2000
Weight, Packed (kg)	255
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -20°C	813 Watt
Connection	230V/50Hz
Connection Load	1062 Watt

HFC refrigerant model also available. Item number: 862700202 (B).  
Please contact us for more details.

# PLUS - Gastronorm Cabinets 2/1 GN Deep

www.hoshizaki-europe.com



## PLUS K 1270 RSG C 8N - Refrigerator

Item Number	862700042 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, 8 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	1270 ltr./44.8 cu.ft.
Volume / Net	1020 ltr./36.0 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	1390 x 876 x 2000
Weight, Packed (kg)	249
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	568 Watt
Connection	230V/50Hz
Connection Load	550 Watt

HFC refrigerant model also available. Item number: 862700042 (B).  
Please contact us for more details.



## PLUS F 1270 RSG C 8N - Freezer

Item Number	862700242 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, 8 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	1270 ltr./44.8 cu.ft.
Volume / Net	1020 ltr./36.0 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	1390 x 876 x 2000
Weight, Packed (kg)	255
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	813 Watt
Connection	230V/50Hz
Connection Load	1062 Watt

HFC refrigerant model also available. Item number: 862700242 (B).  
Please contact us for more details.





## PLUS M 1400 CXG T C 10S - Meat Refrigerator

Item Number	862700102 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, pedal door opener, 8 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	1270 ltr./44.8 cu.ft.
Volume / Net	1020 ltr./36.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1390 x 876 x 2150
Weight, Packed (kg)	249
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	568 Watt
Connection	230V/50Hz
Connection Load	870 Watt

HFC refrigerant model also available. Item number: 862700102 (B).

Please contact us for more details.

## PLUS F 1400 CXG C 10S - Freezer

Item Number	864000202 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, pedal door opener, 10 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	1400 ltr./49.4 cu.ft.
Volume / Net	1134 ltr./40.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	1390 x 876 x 2150
Weight, Packed (kg)	265
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -20°C	813 Watt
Connection	230V/50Hz
Connection Load	1062 Watt



Product shown with optional feet

HFC refrigerant also available. Item number: 864000202 (B).

Please contact us for more details.





## PLUS K 1400 RSG C 10N - Refrigerator

Item Number	864000042 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, 10 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	1400 ltr./49.4 cu.ft.
Volume / Net	1134 ltr./40.0 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	1390 x 876 x 2150
Weight, Packed (kg)	259
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	568 Watt
Connection	230V/50Hz
Connection Load	550 Watt

HFC refrigerant model also available. Item number: 864000042 (B).  
Please contact us for more details.



## PLUS F 1400 RSG C 10N - Freezer

Item Number	864000242 (A)
Equipped With	1 right hand and 1 left hand hinged door each with lock, automatic door closing, 10 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	1400 ltr./49.4 cu.ft.
Volume / Net	1134 ltr./40.0 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	1390 x 876 x 2150
Weight, Packed (kg)	265
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	813 Watt
Connection	230V/50Hz
Connection Load	1062 Watt

HFC refrigerant model also available. Item number: 864000242 (B).  
Please contact us for more details.





**NEW**

# Hoshizaki PROCESS

Refrigerator & Freezer Range



**ECOFRIENDLY**  
**HFCFREE**



Parts & Labour\*

\*All remote compressors product versions are covered by 1 year parts and labour only warranty.

# The PROCESS Range

## Roll-in and Roll-through • Quick Chillers • Blast Chillers/Freezers

Process cabinets are developed to meet the needs of effective temperature control in a food production system. Our product range covers all requirements for the safe and hygienic production of food stuffs in the modern catering environment.

### Our range reaches the following markets:

- Hospitals
- Airport Catering
- Nursing Homes
- Food Production
- Catering
- Bakeries
- Restaurants
- Patisseries
- Delicatessen

### Roll-in and Roll-through

Roll-in and roll-through cabinets are designed for temporary refrigerated storage within a production line e.g. between blast chillers and refrigerated cold rooms. By utilising roll-in cabinets the refrigeration process is unbroken, ensuring time spent on manual handling and re-loading is kept to an absolute minimum.

Both products belong to the latest generation of environmentally friendly Hoshizaki products, which means they are energy optimized.

### Extra Temperature Display

The reverse of the cabinet has an additional temperature display.

### Integral Light

Cabinets with one or two glass doors are equipped with an integral light to the right side of the cabinet.

### Sturdy Handle


Sturdy handle with positive closing system.

### Internal Cabinet

The internal cabinet and the inner side of the door are protected by heavy duty impact cushions.

### Floor and Drive-in Ramp

All roll-through cabinets are fitted with a compact stainless steel floor with an integrated drive-in ramp. In the roll-in series the floor and ramp is optional for K and M1500 refrigerators. The roll-in freezer F1500 has a heated floor as standard.

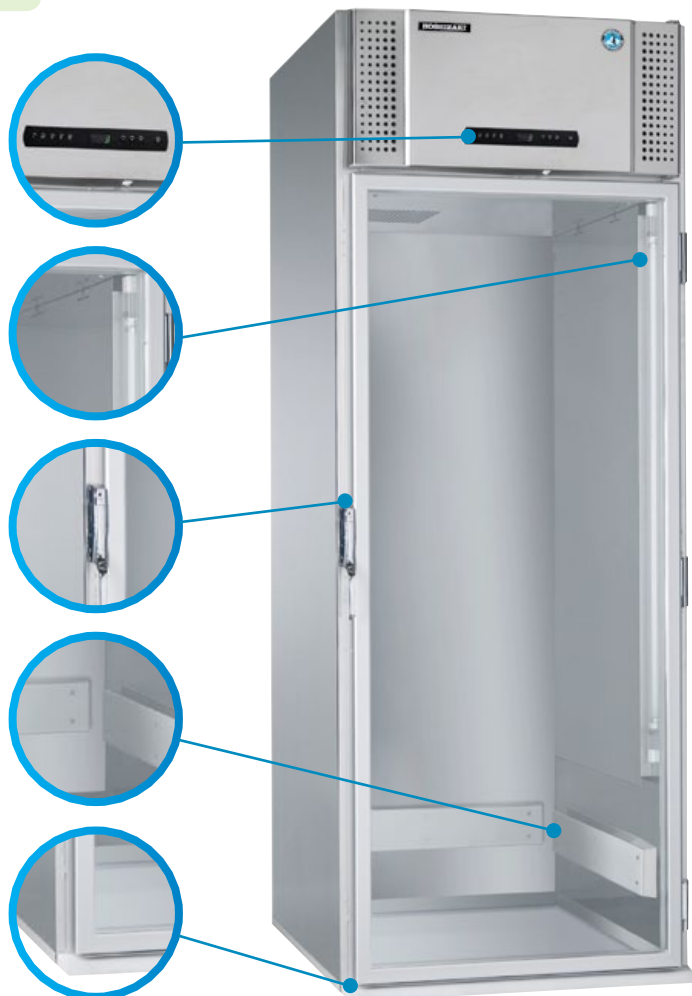

### Ideal for most trolleys currently used

With an internal clear height of 1900mm the cabinets are ideal for most trolleys currently used in commercial kitchen.



## PROCESS Basic Codes:

**K 600 CXG**

	<b>G</b>	HC gas compressor (R290)
	<b>H</b>	HFC compressor (chilling R134a, freezing R404A)
	<b>F</b>	Remote
	<b>S</b>	Brine / Sole / Glycol
	<b>S</b>	Standard equipment, plastified shelving, K temp chilling
	<b>X</b>	Deluxe equipment, stainless shelving, M temp chilling with dry cooling and pedal door opener (not MIDI)
	<b>C</b>	All stainless (except for bottom, back side and compartment)
	<b>R</b>	Stainless front and internal bottom plate, aluminium sides
	<b>L</b>	White exterior front and sides, stainless internal bottom plate and internal aluminium sides
	<b>1500</b>	1500 litre gross volume
	<b>K</b>	+2 / +12°C
	<b>M</b>	-5 / +12°C
	<b>F</b>	-25 / -5°C

## Equipment Codes

<b>T</b>	Dry cooling option in control panel
<b>R4</b>	Expansion valve for R404A
<b>CW</b>	Water cooled condenser
<b>DL</b>	Left hand hung door
<b>LL</b>	Low legs 105 / 130 mm (standard legs are 135-200 mm)
<b>LH</b>	High legs 185 / 250 mm
<b>E</b>	Schuko plug
<b>U</b>	UK plug
<b>A</b>	Reevaporation tray under cabinet (for remote versions only)



### M 1500 CSG - Roll-in Refrigerator

Item Number	861500122 (A)
Equipped With	Right hand hinged reversible door (standard)
Temperature (°C)	-5 to +12
Volume / Gross	1422 ltr./50.4 cu.ft.
Volume / Net	1273 ltr./45.1 cu.ft.
Exterior / Interior	RVS/RVS
External Dimensions W x D x H (mm)	880 x 1088 x 2330
Internal Dimensions W x D x H (mm)	720 x 895 x 1900
Weight, Packed (kg)	185
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	719 Watt
Connection	230V/50Hz
Connection Load	452 Watt

HFC refrigerant model also available. Item number: 861500122 (B).

Please contact us for more details.



### K 1500 CSG - Roll-in Refrigerator

Item Number	861500022 (A)
Equipped With	Right hand hinged reversible door with positive handle and lock
Temperature (°C)	+2 to +12
Volume / Gross	1422 ltr./50.4 cu.ft.
Volume / Net	1273 ltr./45.1 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1088 x 2330
Internal Dimensions W x D x H (mm)	720 x 895 x 1900
Weight, Packed (kg)	185
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	703 Watt
Connection	230V/50Hz
Connection Load	540 Watt

HFC refrigerant model also available. Item number: 861500022 (B).

Please contact us for more details.



## F 1500 CSG - Roll-in Freezer

Item Number	861500222 (A)
Equipped With	Right hand hinged reversible door with positive handle and lock, heated floor in stainless steel
Temperature (°C)	-25 to -5
Volume / Gross	1422 ltr./50.4 cu.ft.
Volume / Net	1273 ltr./45.1 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1088 x 2354
Internal Dimensions W x D x H (mm)	720 x 895 x 1900
Weight, Packed (kg)	185
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	830 Watt
Connection	230V/50Hz
Connection Load	818 Watt

HFC refrigerant model also available. Item number: 861500222 (B).  
Please contact us for more details.



## KG 1500 CSG - Roll-in Refrigerator

Item Number	861510322 (A)
Equipped With	Right hand hinged reversible glass door with positive handle and lock
Temperature (°C)	+2 to +12
Volume / Gross	1523 ltr./54.0 cu.ft.
Volume / Net	1370 ltr./48.6 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1108 x 2354
Weight, Packed (kg)	195
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	703 Watt
Connection	230V/50Hz
Connection Load	530 Watt

HFC refrigerant model also available. Item number: 861510322 (B).  
Please contact us for more details.







## K 1500 D CSG - Roll-through Refrigerator

Item Number	861520022 (A)
Equipped With	Right hand hinged reversible door with positive handle and bottom cold-retaining strip. With floor in stainless steel with drive-in ramp
Temperature (°C)	+2 to +12
Volume / Gross	1523 ltr./54.0 cu.ft.
Volume / Net	1370 ltr./48.6 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1108 x 2354
Internal Dimensions W x D x H (mm)	720 x 965 x 1900
Weight, Packed (kg)	185
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	703 Watt
Connection	230V/50Hz
Connection Load	490 Watt

HFC refrigerant model also available. Item number: 861520022 (B).  
Please contact us for more details.



## KG 1500 D CSG - Roll-through Refrigerator

Item Number	861530322 (A)
Equipped With	Right hand hinged reversible door with positive handle and bottom cold-retaining strip. With floor in stainless steel with drive-in ramp
Temperature (°C)	+2 to +12
Volume / Gross	1523 ltr./54.0 cu.ft.
Volume / Net	1370 ltr./48.6 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1108 x 2354
Internal Dimensions W x D x H (mm)	720 x 965 x 1900
Weight, Packed (kg)	195
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	703 Watt
Connection	230V/50Hz
Connection Load	530 Watt

HFC refrigerant model also available. Item number: 861530322 (B).  
Please contact us for more details.



## KGK 1500 D CSG - Roll-through Refrigerator

Item Number	861530422 (A)
Equipped With	Right hand hinged reversible door with positive handle and bottom cold-retaining strip. With floor in stainless steel with drive-in ramp
Temperature (°C)	+2 to +12
Volume / Gross	1523 ltr./54.0 cu.ft.
Volume / Net	1370 ltr./48.6 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1108 x 2354
Internal Dimensions W x D x H (mm)	720 x 965 x 1900
Weight, Packed (kg)	205
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	703 Watt
Connection	230V/50Hz
Connection Load	570 Watt

HFC refrigerant model also available. Item number: 861530422 (B).  
Please contact us for more details.



## F 1500 CSF - Roll-in Freezer - Remote

Item Number	861500223 (B)
Equipped With	Right hand hinged reversible door with positive handle and lock, heated floor in stainless steel
Temperature (°C)	-25 to -5
Volume / Gross	1422 ltr./50.4 cu.ft.
Volume / Net	1273 ltr./45.1 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1084 x 2354
Internal Dimensions W x D x H (mm)	720 x 895 x 1900
Weight, Packed (kg)	160
Insulation	60mm (cyclopentane)
Refrigerant	R404A
Ref. Capacity at -10°C	625 Watt
Connection	230V/50Hz
Connection Load	531 Watt





## M 1500 CSF - Roll-through Refrigerator - Remote

Item Number	861500123 (B)
Equipped With	Right hand hinged reversible door with positive handle and lock
Temperature (°C)	-5 to +12
Volume / Gross	1422 ltr./50.4 cu.ft.
Volume / Net	1273 ltr./45.1 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1088 x 2330
Internal Dimensions W x D x H (mm)	720 x 895 x 1900
Weight, Packed (kg)	160
Insulation	60mm (cyclopentane)
Refrigerant	R134a
Ref. Capacity at -25°C	700 Watt
Connection	230V/50Hz
Connection Load	108 Watt



## K 1500 CSF - Roll-through Refrigerator - Remote

Item Number	861500023 (B)
Equipped With	Right hand hinged reversible door with positive handle and lock
Temperature (°C)	+2 to +12°C
Volume / Gross	1422 ltr./50.4 cu.ft.
Volume / Net	1273 ltr./45.1 cu.ft.
Exterior / Interior	Stainless/Stainless
External Dimensions W x D x H (mm)	880 x 1084 x 2330
Internal Dimensions W x D x H (mm)	720 x 895 x 1900
Weight, Packed (kg)	160
Insulation	60mm (cyclopentane)
Refrigerant	R134a
Ref. Capacity at -25°C	700 Watt
Connection	230V/50Hz
Connection Load	90 Watt



## KGG 1500 D CSF - Roll-through Refrigerator - Remote

Item Number	861530423 (B)
Equipped With	Right hand hinged reversible door (standard), 2 Glass doors, roll-through and RVS access ramp
Temperature (°C)	+2 to +12°C
Volume / Gross	1523 ltr./54.0 cu.ft.
Volume / Net	1370 ltr./48.6 cu.ft.
Exterior / Interior	RVS/RVS
External Dimensions W x D x H (mm)	880 x 1108 x 2354
Internal Dimensions W x D x H (mm)	720 x 965 x 1900
Weight, Packed (kg)	180
Insulation	60mm (cyclopentane)
Refrigerant	R134a
Ref. Capacity at -25°C	719 Watt
Connection	230V/50Hz
Connection Load	464 Watt





**NEW**

# Hoshizaki TWIN

Refrigerator & Freezer Range



**ECOFRIENDLY  
HFCFREE**



Parts & Labour

# TWIN Product Highlights



## Lighting

Bright halogen lamps light up when the door is opened. Simultaneously, the air distribution fan switches off, minimising loss of cold air.



## Sturdy wire shelves with tilt prevention

The sturdy wire shelves are supported on stainless steel U-rails that prevent the shelves from tilting when pulled out.

These are available both in stainless steel and plastic-coated.



## Easy to Use


Self-closing door on all models and foot pedal opener.

## An Advanced Electronic Controller

The electronic controller is your security:

- Digital indication of temperature
- Acoustic door alarm
- The control panel can also be locked against tampering
- Volt-free contacts to allow a remote alarm system to be set up
- M-versions of CX models have dry cool and rapid thaw functions

Dry cooling reduces the condensation on the surface of the food items. Controlled thawing of frozen food reduces shrinkage and ensures optimal food hygiene.

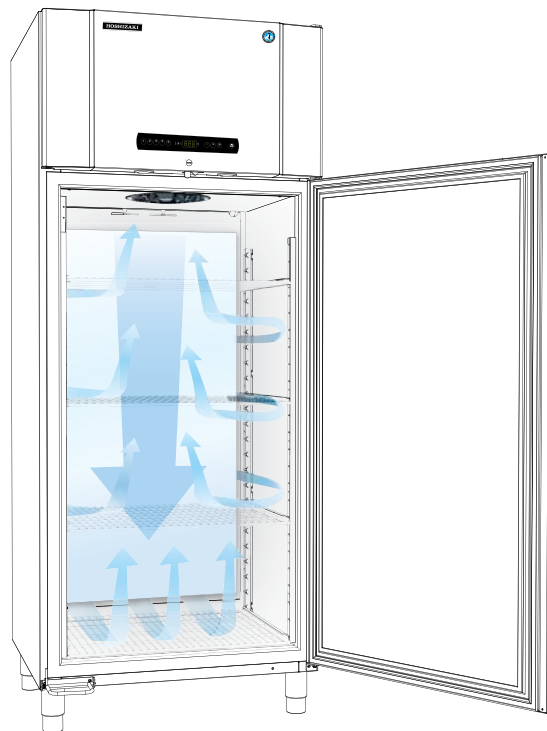

Full-Height Integrated handle



Standard door Lock

## Unique Air Distribution System

The TWIN cabinet maintains a correct and uniform temperature throughout. The cold air is directed down behind the air distribution plate which is positioned at the back of the cabinet. From there, it circulates around the cabinet and back to the evaporator fan in the top of the cabinet.



# TWIN Definitions

## TWIN Basic Codes:

<b>K</b>	<b>600</b>	<b>CXG</b>	
			<b>G</b> HC gas compressor (R290) <b>H</b> HFC compressor (chilling R134a, freezing R404A) <b>F</b> Remote <b>S</b> Brine / Sole / Glycol
			<b>S</b> Standard equipment, plastified shelving, K temp chilling <b>X</b> Deluxe equipment, stainless shelving, M temp chilling with dry cooling and pedal door opener
			<b>C</b> All stainless (except for bottom, back side and compartment) <b>R</b> Stainless front and internal bottom plate, aluminium sides <b>L</b> White exterior front and sides, stainless internal bottom plate and internal aluminium sides
			<b>600</b> 600 litre gross volume <b>660</b> 660 litre gross volume <b>1270</b> 1270 litre gross volume <b>1400</b> 1400 litre gross volume
			<b>K</b> +2 / +12°C <b>M</b> -5 / +12°C <b>F</b> -25 / -5°C

## Equipment Codes

<b>T</b>	Dry cooling option in control panel
<b>R4</b>	Expansion valve for R404A
<b>CW</b>	Water cooled condenser
<b>DL</b>	Left hand hung door
<b>PD</b>	Foot pedal door opener
<b>P</b>	Delivered without legs/castors for mounting on a plinth
<b>C</b>	Castors 125 mm
<b>LL</b>	Low legs 105 / 130 mm (standard legs are 135 - 200 mm)
<b>LH</b>	High legs 185 / 250 mm
<b>3S/8S</b>	Number of shelves in stainless
<b>3N/8N</b>	Number of shelves in plastified (nylon)
<b>E</b>	Schuko plug
<b>U</b>	UK plug
<b>A</b>	Reevaporation tray under cabinet (for remote versions only)





Product shown with optional feet

## TWIN M 600 CXG T C 4S - Meat Refrigerator

Item Number	866010102 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 4 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2000
Weight, Packed (kg)	117
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	420 Watt

HFC refrigerant model also available. Item number: 866010102 (B).  
Please contact us for more details.

## TWIN F 600 CXG C 4S - Freezer



Item Number	866010202 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 4 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2000
Weight, Packed (kg)	122
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866010202 (B).  
Please contact us for more details.

# TWIN - Gastronorm Cabinets 2/1 Wide

www.hoshizaki-europe.com



## TWIN K 600 RSG C 4N - Refrigerator

Item Number	866010042 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	815 x 756 x 2000
Weight, Packed (kg)	117
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 866010042 (B).  
Please contact us for more details.



## TWIN F 600 RSG C 4N - Freezer

Item Number	866010242 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 4 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	600 ltr./21.2 cu.ft.
Volume / Net	506 ltr./17.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	815 x 756 x 2000
Weight, Packed (kg)	122
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866010242 (B).  
Please contact us for more details.





Product shown with optional feet

## TWIN M 66o CXG T C 5S - Meat Refrigerator

Item Number	866610102 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 5 stainless shelves, drycooling, rapid thaw, castors
Temperature (°C)	-5 to +12
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	123
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	420 Watt
Power Consumption	1.6 kWh/24h

HFC refrigerant model also available. Item number: 866610102 (B).  
Please contact us for more details.

## TWIN F 66o CXG C 5S - Freezer



Item Number	866610202 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, pedal door opener, 5 stainless shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	130
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866610202 (B).  
Please contact us for more details.

# TWIN - Gastronorm Cabinets 2/1 Wide

www.hoshizaki-europe.com



## TWIN K 66o RSG C 5N - Refrigerator

Item Number	866610042 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	123
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	394 Watt

HFC refrigerant model also available. Item number: 866610042 (B).  
Please contact us for more details.



Product shown with optional feet

## TWIN F 66o RSG C 5N - Freezer

Item Number	866610242 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	Stainless, alu./Stainless, alu.
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	130
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866610242 (B).  
Please contact us for more details.





Product shown with optional feet

## TWIN K 66o LSG C 5N - Refrigerator

Item Number	866610062 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	+2 to +12
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	123
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	254 Watt
Connection	230V/50Hz
Connection Load	294 Watt

HFC refrigerant model also available. Item number: 866610062 (B).  
Please contact us for more details.



Product shown with optional feet

## TWIN F 66o LSG C 5N - Freezer

Item Number	866610262 (A)
Equipped With	Right hand hinged reversible door with lock, automatic door closing, 5 grey shelves, castors
Temperature (°C)	-25 to -5
Volume / Gross	660 ltr./23.3 cu.ft.
Volume / Net	563 ltr./19.9 cu.ft.
Exterior / Interior	White/Stainless, alu.
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	130
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -25°C	490 Watt
Connection	230V/50Hz
Connection Load	512 Watt

HFC refrigerant model also available. Item number: 866610262 (B).  
Please contact us for more details.



## TWIN KK 66o CXG C 4S Combi Refrigerator / Refrigerator

Item Number	866630002 (A)
Technology	Dual temperature cabinet with 2 compressor systems
Equipped With	Right hand hinged reversible doors with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	<b>T</b> +2 to +12 <b>B</b> +2 to +12
Volume / Gross	<b>T</b> 282 ltr./10.0 cu.ft. <b>B</b> 225 ltr./8.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	138
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt / 314 Watt
Connection	230V/50Hz
Connection Load	521 Watt

HFC refrigerant model also available. Item number: 866630002 (B).  
Please contact us for more details.



## TWIN KM 66o CXG C 4S Combi Refrigerator / Meat Refrigerator

Item Number	866630102 (A)
Technology	Dual temperature cabinet with 2 compressor systems
Equipped With	Right hand hinged reversible doors with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	<b>T</b> +2 to +12 <b>B</b> -5 to +12
Volume / Gross	<b>T</b> 282 ltr./10.0 cu.ft. <b>B</b> 225 ltr./8.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	175
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt / 314 Watt
Connection	230V/50Hz
Connection Load	521 Watt

HFC refrigerant model also available. Item number: 866630102 (B).  
Please contact us for more details.





## TWIN KF 66o CXH C 4S Combi Refrigerator / Freezer

Item Number	866630202 (A)
Technology	Dual temperature cabinet with 2 compressor systems
Equipped With	Right hand hinged reversible doors with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	<b>T</b> +2 to +12 <b>B</b> -25 to -5
Volume / Gross	<b>T</b> 282 ltr./10.0 cu.ft. <b>B</b> 225 ltr./8.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	143
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt / 122 Watt
Connection	230V/50Hz
Connection Load	521 Watt

HFC refrigerant model also available. Item number: 866630202 (B).  
Please contact us for more details.

## TWIN MK 66o CXH C 4S Combi Meat Refrigerator / Refrigerator



Item Number	866630538 (A)
Technology	Dual temperature cabinet with 2 compressor systems
Equipped With	Right hand hinged reversible doors with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	<b>T</b> -5 to +12 <b>B</b> +2 to +12
Volume / Gross	<b>T</b> 282 ltr./10.0 cu.ft. <b>B</b> 225 ltr./8.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	175
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt / 314 Watt
Connection	230V/50Hz
Connection Load	521 Watt

HFC refrigerant model also available. Item number: 866630538 (B).  
Please contact us for more details.





## TWIN MM 66o CXH C 4S

### Combi Meat Refrigerator / Meat Refrigerator

Item Number	866630539 (A)
Technology	Dual temperature cabinet with 2 compressor systems
Equipped With	Right hand hinged reversible doors with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	<b>T</b> -5 to +12 <b>B</b> -5 to +12
Volume / Gross	<b>T</b> 282 ltr./10.0 cu.ft. <b>B</b> 225 ltr./8.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	175
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt / 314 Watt
Connection	230V/50Hz
Connection Load	527 Watt

HFC refrigerant model also available. Item number: 866630539 (B).  
Please contact us for more details.



## TWIN MF 66o CXH C 4S

### Combi Meat Refrigerator / Freezer

Item Number	866630302 (A)
Technology	Dual temperature cabinet with 2 compressor systems
Equipped With	Right hand hinged reversible doors with lock, automatic door closing, 4 stainless shelves, castors
Temperature (°C)	<b>T</b> +2 to +12 <b>B</b> -5 to +12
Volume / Gross	<b>T</b> 282 ltr./10.0 cu.ft. <b>B</b> 225 ltr./8.0 cu.ft.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	175
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt / 314 Watt
Connection	230V/50Hz
Connection Load	521 Watt

HFC refrigerant model also available. Item number: 866630302 (B).  
Please contact us for more details.





## TWIN FF 66o CXG C 4S Combi Freezer / Freezer

Item Number	866630516 (A)
Technology	Dual temperature cabinet with 2 compressor systems
Temperature (°C)	<b>T</b> -25 to -5 <b>B</b> -25 to -5
Volume / Gross	<b>T</b> 282 ltr./242 ltr. <b>B</b> 225 ltr./188 ltr.
Exterior / Interior	Stainless/Stainless
Dimensions W x D x H (mm)	815 x 756 x 2150
Weight, Packed (kg)	148
Insulation	60mm (cyclopentane)
Refrigerant	R290 (HC, Green)
Ref. Capacity at -10°C	314 Watt / 314 Watt
Connection	230V/50Hz
Connection Load	527 Watt

HFC refrigerant model also available. Item number: 866630516 (B).  
Please contact us for more details.



# HOSHIZAKI

## Hoshizaki Europe B.V.

Tel. +31 20 6918499  
Fax +31 20 6918768  
sales@hoshizaki.nl

## Hoshizaki UK (UK, Ireland)

Tel. +44 845 456 0585  
Fax +44 132 283 8331  
uksales@hoshizaki.co.uk

## Hoshizaki Deutschland (Germany, Switzerland, Austria)

Tel. +49 2154/92810  
Fax +49 2154/928128  
info@hoshizaki.de

## Hoshizaki France

Tel. +33 1 48 63 93 80  
Fax +33 1 48 63 93 88  
info@hoshizaki.fr

## Hoshizaki Iberia (Spain, Portugal)

Tel. +34.93.478.09.52  
Fax +34.93.478.08.00  
info@hoshizaki.es

## Hoshizaki Middle East

Tel. +971 48 876 612  
Fax +971 48 876 613  
sales@hoshizaki.ae

## Hoshizaki Nederland & België

Tel. +31 20 5650420 (Nederland)  
Tel. +32 2 712 30 30 (België)  
Fax +31 20 6918768  
sales@hoshizaki.nl (Nederland)  
info@hoshizaki.be (België)

[www.hoshizaki-europe.com](http://www.hoshizaki-europe.com)

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hoshizaki Europe B.V. assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.